



ZeroAir 5 - ZeroAir 20

Laboratory Zero Air Generator

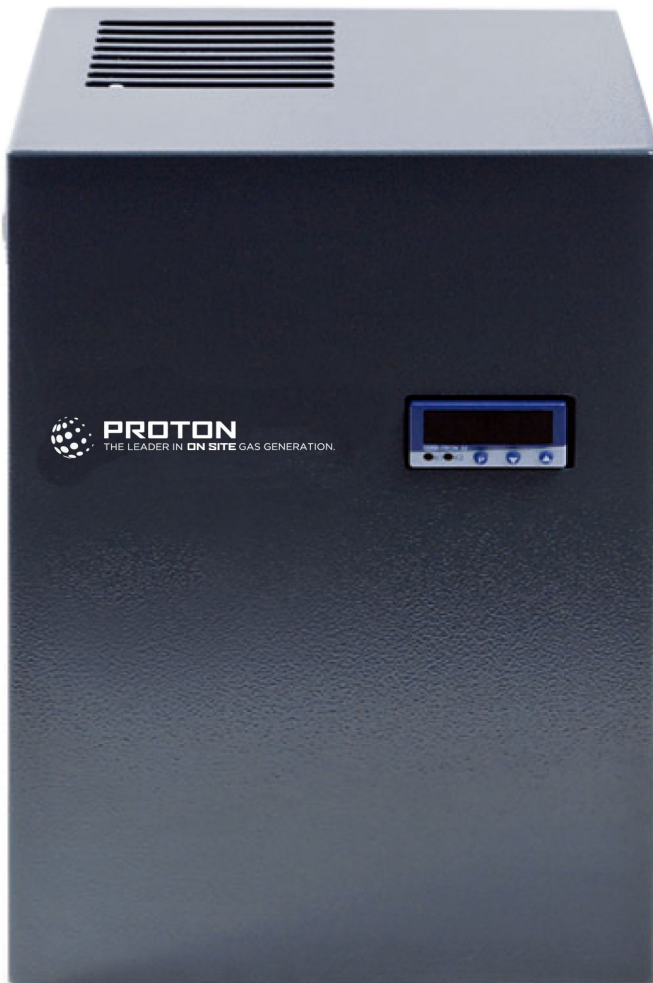

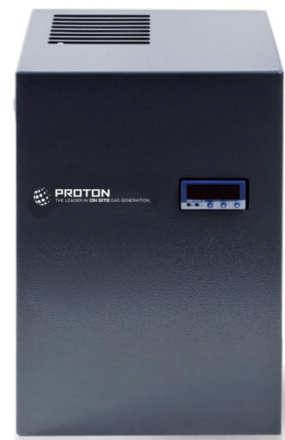

TECHNICAL FEATURES	ZeroAir 5	ZeroAir 20
FLOW RATE	5 SLPM	20 SLPM
TECHNOLOGIES EMPLOYED	Platinum-Palladium catalytic reactor	
INPUT/OUTPUT PRESSURE	0 to 10 barg / 0 to 145 psig	
PURITY: TOTAL HYDROCARBONS RESIDUAL WITH CATALYSER	< 1 ppm	
AIR INPUT AND OUTPUT CHARACTERISTICS	Particulate $\leq 0.1 \text{ mg/m}^3$ ($\leq 0.01 \text{ }\mu\text{m}$) Oil Vapors $\leq 0.01 \text{ mg / m}^3$ Moisture $\leq 3^\circ\text{C}$ dew point in pressure	
AIR COMPRESSOR	No	
ELECTRICAL SUPPLY	115 VAC $\pm 10\%$ 50/60 Hz 230 VAC $\pm 10\%$ 50/60 Hz	
INDEX OF PROTECTION	IP20	
OPERATING TEMPERATURE	40°F to 100°F / 5°C to 40°C	
ENIRONMENTAL MOISTURE	$\leq 80\%$, no condensation	
MAX ALTITUDE	2000 m or 6560 ft above sea level	
DIMENSIONS	13.8" (H) x 7.9" (W) x 6.3" (D) 35 cm (H) x 20 cm (W) x 16 cm (D)	
WEIGHT	13.2 lbs / 6 kg	
APPLICATIONS	For GC FID, THC, NOX, BTX and SOX analyzers	
ACCESSORIES		
	Installation kit	
	Automatic 2 sources switch kit	
	Use balancing for parallel connection	
	UHP filtration kit	



PD-0600-0076 Rev. B.
 © 2010 Proton OnSite. All Rights Reserved.
 Proton, Proton OnSite, Proton Energy Systems, HOGEN, and the Proton symbol are trademarks of Proton Energy Systems, Inc. d/b/a Proton OnSite.

